

● Features

- Smaller and lighter than DCL Series
- Small-sized, large capacity
- Wider temperature range(-25~70℃) than battery makes periodic change unnecessary

● Applications

- Memory back-up for Video, Audio, Cameras, CCTV, Printer, Camcorder, Telephones, Car stereo, e-meter, toy, Computer, Notebook PC, Rice cooker, home network etc

● Specifications




V-TYPE

H-TYPE

C-TYPE

Items	Characteristics
Rated working voltage	5.5VDC
Operating temperature	-25 to +70℃
Maximum surge voltage	6.3VDC
Nominal Cap. range	0.047 to 0.47F
Capacitance tolerance	-20% to +80%(at 25℃)
Low temperature(-25℃) characteristics	Capacitance change : ≤ 50% of initial measured value at +25℃ Internal resistance : Less than five time of the initial value at +25℃
Endurance	Capacitance change : ±30% of initial measured value Internal resistance : Less than four time of the initial specified value at +25℃ (After 1,000hours application of rated DC working voltage at +70℃, the capacitor shall meet the following limits.)
Shelf life	After 1,000hours storage at +70℃ without load, the capacitor shall meet the specified limit for "Endurance"

● Dimensions in mm(not to scale)

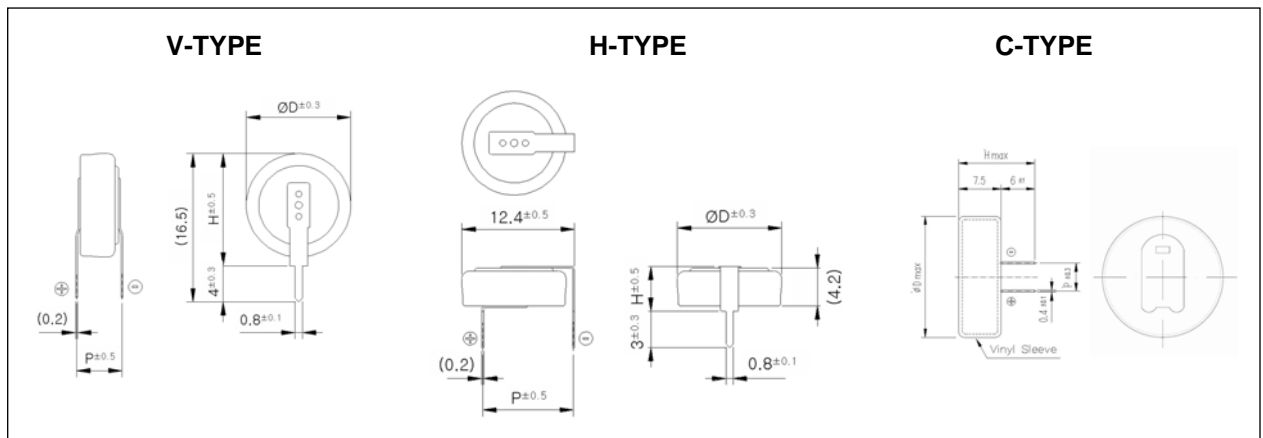

● Standard products

Part Number	Operating Voltage (V)	Capacitance (F)	ESR (Ω, @1kHz)	V type(mm)			H type(mm)			C type(mm)		
				ΦD	H	P	ΦD	H	P	ΦD	H	P
DCS 5R5 473	5.5	0.047	≤ 120	11.5	12.5	5.0	11.5	5.5	10.0	13.5	6.5	5.0
DCS 5R5 104		0.10	≤ 75	11.5	12.5	5.0	11.5	5.5	10.0	13.5	6.5	5.0
DCS 5R5 224		0.22	≤ 75	11.5	12.5	5.0	11.5	5.5	10.0	13.5	6.5	5.0
DCS 5R5 334		0.33	≤ 50	11.5	12.5	5.0	11.5	5.5	10.0	13.5	6.5	5.0
DCS 5R5 474		0.47	≤ 50	11.5	12.5	5.0	11.5	5.5	10.0	13.5	6.5	5.0

Note : It is not allowed to go through reflow (IR, Atmosphere heating methods etc.) process